
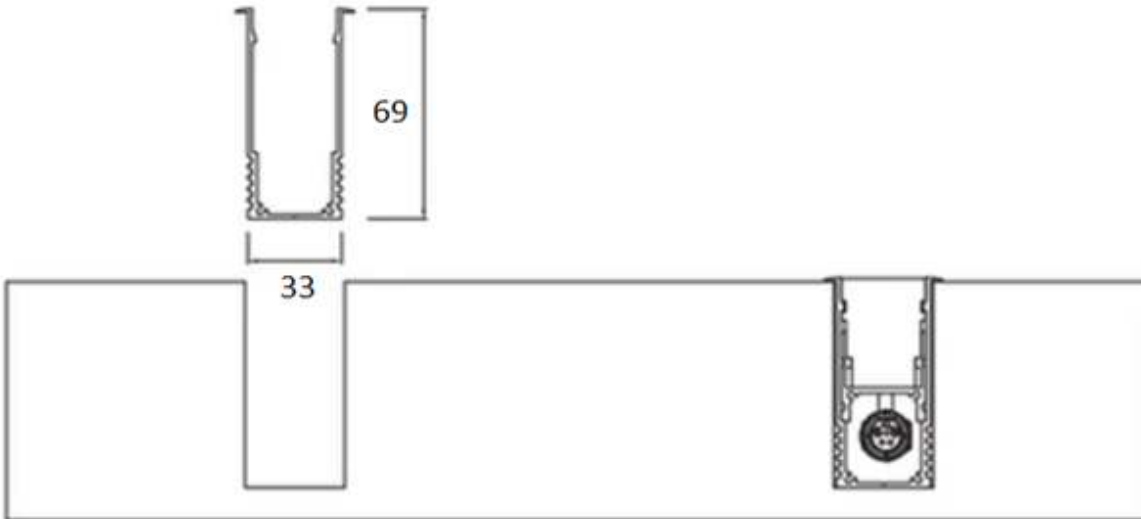


10W YERE GÖMME LİNEER İZ AYDINLATMA

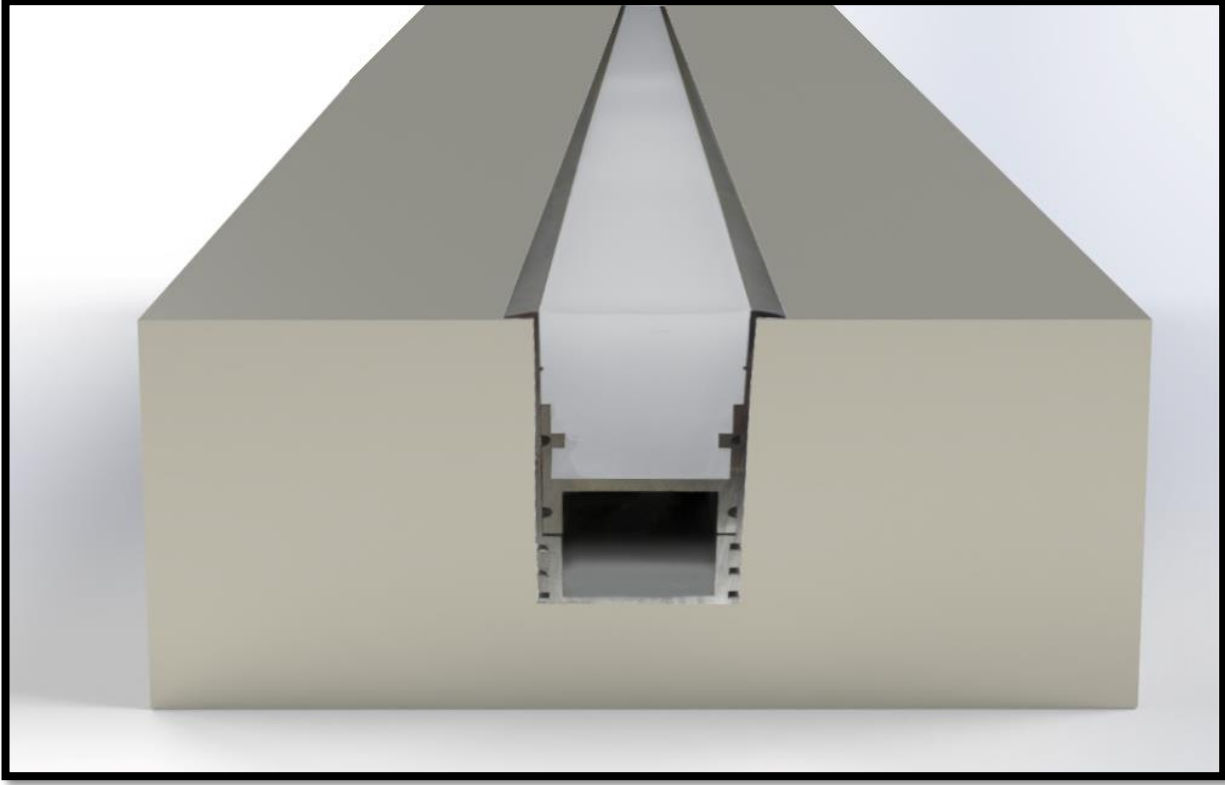



Zemine Gömme Lineer LED Armatür

10W YERE GÖMME LİNEER AYDINLATMA

	ÖZELLİKLER
LED:	SAMSUNG / NICHIA / OSRAM
DRİVER:	MEANWELL/EAGLERISE / TEXRUN
KORUMA SINIFI:	IP68
GÜÇ:	10W
IŞIK AKISI:	1070 - 1160 lm
Renk sıcaklığı / Colour temperature:	2700K – 6500K
Etkinlik faktörü (lm/W) 107	2700K
Etkinlik faktörü (lm/W) 116	6500K
Gövde:	Alüminyum ekstrüzyon gövde
IK	10
Renksel geriverim / CRI:	80
Kablo 3x0.75 H05RN-F:	Kauçuk aleve, yağa, aşınmaya dayanıklı
Kontrol seçenekleri:	On-Off Kontrol(std) / 24V DC / 1-10V / Dali dimmer
Bağlantı:	TTAF IP68 Bağlantı
Hareket / varlık sensörü	-
Güvenlik sınıfı:	⚡ I

YÜKSEK DARBE DAYANIMI İLE SU ALTI KULLANIMA UYGUN



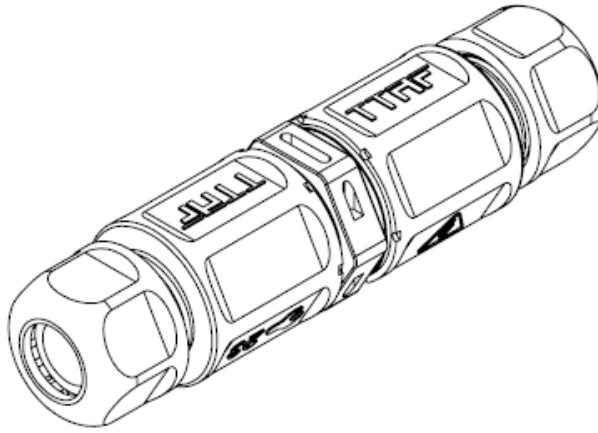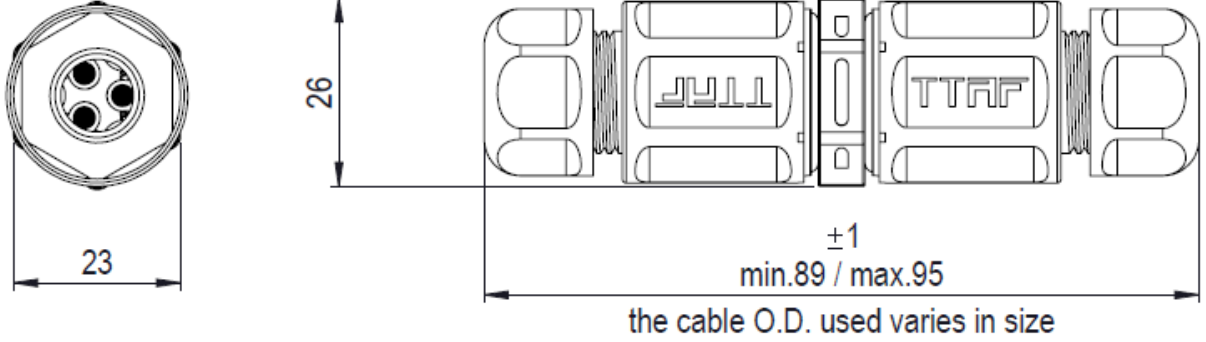

Technical Specifications

Number of Poles	3
Voltage Rating	250VAC max.
Current Rating	20A max.
Cable Cross Section Area	0,5 ~2,5mm ²
Durability Voltage	1500VAC@60s.
Insulation Structure	500 MΩ at 500VDC
Contact Resistance	10 mΩ max.
Min Wire Size OD	6mm
Max Wire Size OD	10mm
Operating Temperature	-40°C ~ +85°C
IP Rating	IP68(10m / 60min.)
Mold Material	PA6
Contact/Terminal Material	Nickel-Plated Brass
Seal Material	Silicone

TTAF IP68 BAĞLANTI



